

S48

6"

Pompe per pozzi da 6"
Pumps for 6" wells
Pompes pour puits de 6"

1



Bocca di mandata in ottone.
Brass discharge head.
Piese de refoulement en laiton.

2



Valvola di non-ritorno incorporata sulla testata.
Discharge head non return valve.
Clapet anti-retour incorporé.

3



Bronzina superiore in bronzo o, a richiesta, in gomma antisabbia.
Upper bush made in bronze or, upon request, in anti-sand rubber.
Palier superieur en bronze ou sur demande en caoutchouc anti sable.

4



Giranti e diffusori in Noryl con anelli di rasamento in acciaio inox. Alto rendimento.
Noryl made impellers and diffuser with stainless steel wear-inserts. High efficiency.
Roues et diffuseurs en Noryl avec anneaux d'usure en inox. Haut rendement.

5



Camicia in acciaio inox.
Stainless steel shell.
Chemise en acier inox.

6



Filtro in acciaio inox.
Stainless steel strainer.
Crepine en acier inox.

7



Flangia d'accoppiamento secondo norme NEMA.
Bracket to couple to the motor acc.to NEMA standards.
Bride d'accouplement au moteur selon normes NEMA.

1

2


3

4

5

6

7

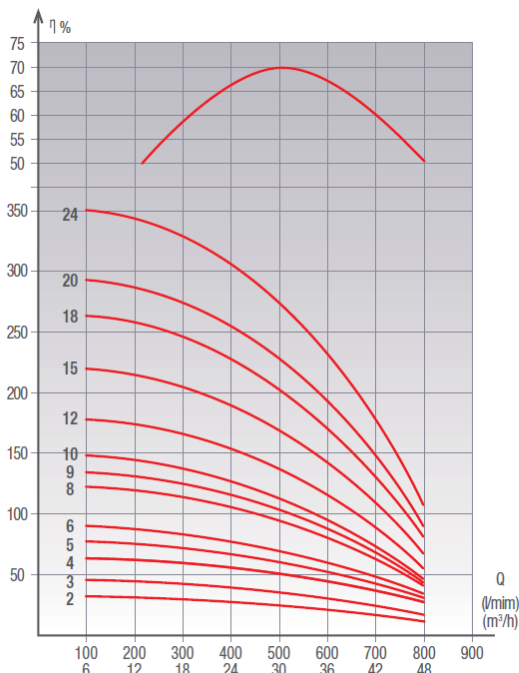

Tipo Type Type	Motore Motor Moteur		Q	Portata - Capacity - Debit							Dimensioni e Pesì Dimension and Weight Dimension et Masses	
	kw	HP		PRESSIONE m - TOTAL HEAD m - HAUTEUR D'ELEVATION m							mm	kg
				0	18	24	30	36	42	48		
			0	79.26	105.68	132.10	158.52	184.94	211.36			
			0	300	400	500	600	700	800			
S48-2	3	4	29	26	25	23	19	14	8	540	12.3	
S48-3	4	5.5	46	42	39	36	30	23	13	600	13.3	
S48-4	5.5	7.5	60	54	50	46	38	28	18	660	14	
S48-5	7.5	10	74	68	63	57	48	36	22	720	15.8	
S48-6	9.3	12.5	90	81	76	69	57	43	26	780	16.5	
S48-8	11	15	121	109	101	92	76	57	35	900	18	
S48-9	13	17.5	135	122	115	103	86	65	40	960	18.8	
S48-10	15	20	150	136	127	114	96	72	46	1020	19.5	
S48-12	18.5	25	180	163	144	137	115	86	53	1145	21	
S48-15	22	30	225	204	191	171	144	108	67	1325	23.3	
S48-18	25	35	271	245	229	205	173	129	80	1555	26.4	
S48-20	30	40	301	272	254	228	190	142	87	1675	27.9	
S48-24	37	50	360	324	303	273	226	163	104	1915	31.5	